




ACC-1021 Side Mirrors Installation Instructions

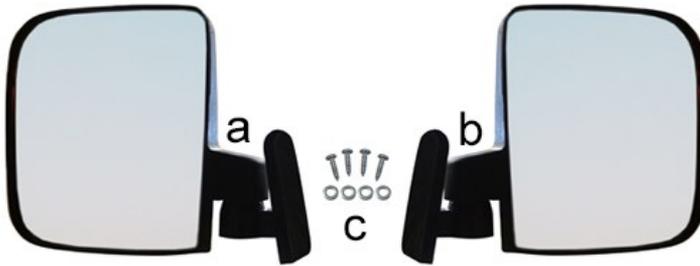

Contents of ACC-1021 Side Mirror Kit

- a (1 ea.) Driver Side Mirror
- b (1 ea.) Passenger Side Mirror
- c (1 ea.) Bag of Mounting Hardware
- d (1 ea.) Installation Instructions

Tools Needed for Installation

- Drill and Drill Bit (1/8")
- Phillips Head Screwdriver
- Measuring Tape
- Thin Round File or Sand Paper

Caution: Please read through the instructions carefully. Look behind each drill location BEFORE YOU DRILL. Installer is responsible for damage). Safety glasses should be worn when drilling and filing.

Before You Start

1. Turn the key to the OFF position.
2. Electric Carts Only: Place Tow/Run Switch in TOW.
3. Engage the parking brake.

Mirror Installation

1. Hold the driver side mirror to the outside of the driver side front strut to identify the best mounting location for the driver.

NOTE: If installing a windshield, keep in mind the placement of the windshield when selecting a mounting location for the mirror.



2. With the mirror in the correct position, use a marking device to mark the location of the mounting holes on the driver side front strut. Set the mirror in a safe location.



3. Use an 1/8" drill bit to drill the top and bottom marked hole locations on the driver side strut. Do NOT drill completely through the strut. Only drill through the first wall. File or sand any rough edges.
4. Use the included mounting hardware to mount the mirror to the strut. Do not over tighten the mounting screws.
5. Repeat steps 1-4 for the passenger side mirror. Use a measuring tape to make sure the passenger mirror is at the same height as the driver side mirror.
6. Adjust the mirrors to comfortable position for the driver. Do NOT over tighten the adjustment nut.



**RUGGED
STARTS
HERE**

This completes the installation of your RHOX Side Mirror Set. Please enjoy safely!

Scan QR code or use the link below to view the installation video.

<https://vimeo.com/user39935056>

