



LONG TRACK TOPS™

4-PASSENGER TOP KITS

FITS FOLLOWING MAKES & MODELS WITH DOUBLETAKE REAR SEAT KITS: CLUB CAR DS & PRECEDENT / E-Z-GO TXT & RXV / YAMAHA G14-G19, DRIVE, & DRIVE 2.

NOTE: Kits include Rear Frames and Front Frame Brackets where applicable.

TABLE OF CONTENTS:

- Step 1** - Install Front Frame Brackets
- Step 2** - Install Rear Frames
- Step 3** - Install Track Tops
- Step 4** - Secure Top to Rear Frames

PREPARE CAR FOR INSTALLATION:

- Remove the following:
- Factory Top
 - Top Supports/Drain Tubes
 - Bench Back Cushion
 - Bag Rack Assembly

NOTE: Save original hardware for later use.

IMPORTANT: Do not fully tighten hardware until instructed. Read through all instructions before beginning installation.

MADE IN THE
★USA★
WITH PRIDE



STEP 1 INSTALL FRONT FRAME BRACKETS


Mount Front Frame Brackets to Top Frame according to your car model. (SEE INSTRUCTIONS INCLUDED WITH FRONT FRAME BRACKET KIT)

STEP 2 INSTALL SEAT PLATES & REAR FRAMES

FOR USE WITH DOUBLETAKE REAR SEAT KITS — FITS: CLUB CAR DS & PRECEDENT / E-Z-GO TXT & RXV / YAMAHA G14-G19, DRIVE, & DRIVE 2. EACH CAR MODEL HAS UNIQUE SEAT BACK SUPPORTS, BUT ALL REAR FRAMES MOUNT THE SAME. INSTALLATION IS PICTURED ON A CLUB CAR PRECEDENT.


UNIVERSAL SEAT PLATES

For ease of installation install Universal Seat Plates onto Seat Back Supports before installing Rear Frames. See the **Seat Plate Kit Instructions** for mounting to Seat Back Supports.

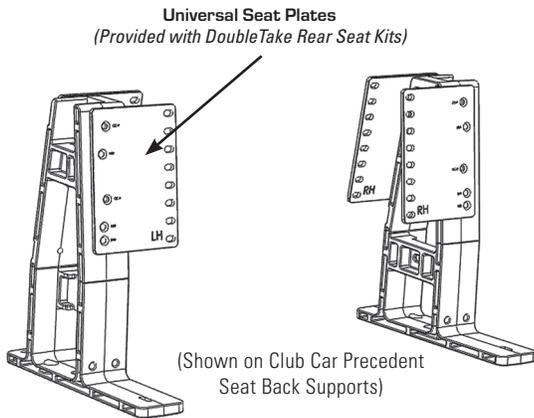


REAR FRAMES

Mount the Rear Frames, to the Seat Back Supports, with the top bent legs facing to the rear of the car. **NOTE:** Leave HW loose until Top is installed.

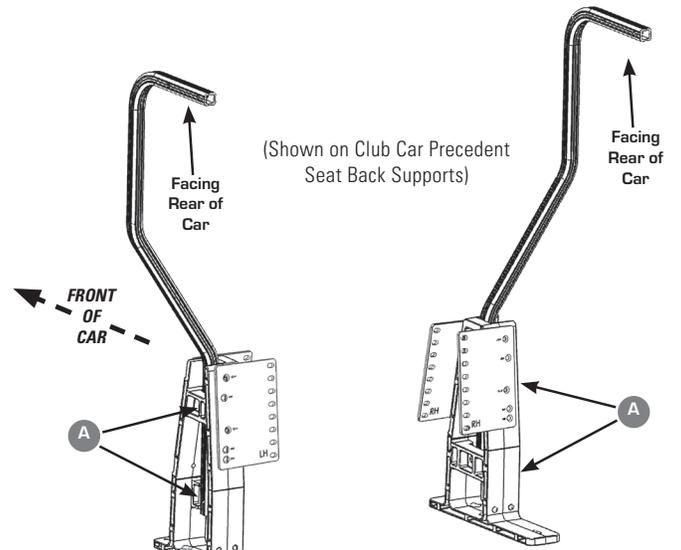

HARDWARE - SCALE 1:1

A x4

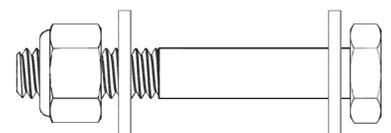

1/4" X 1-3/4" Hex Bolt - 1/4" Flat Washer (x2) - 1/4" Nylon Nut

STEP


3

INSTALL TRACK TOP ON FRONT FRAME(S)

Rest the Top on Front & Rear Frames, attach to Front Frames with provided hardware. **** Place Rubber Washers (B) between Brackets & Frames when installing ****


YAMAHA G14-19 & G22

— Fully tighten Hardware.

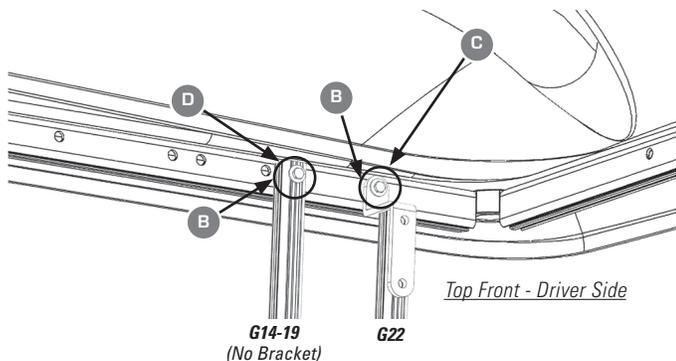


CLUB CAR DS & PRECEDENT / YAMAHA DRIVE & DRIVE 2

— Fully tighten Hardware.

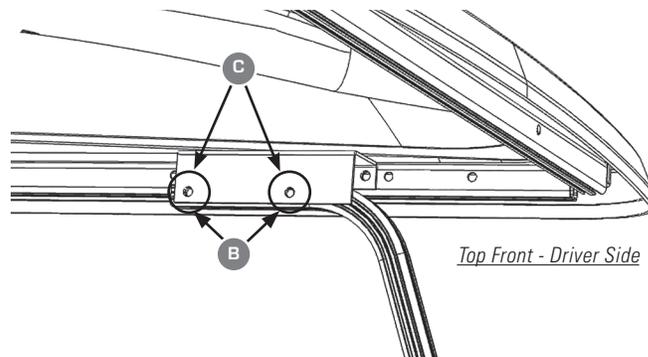


E-Z-GO TXT / 2013 & OLDER

— Fully tighten Hardware.

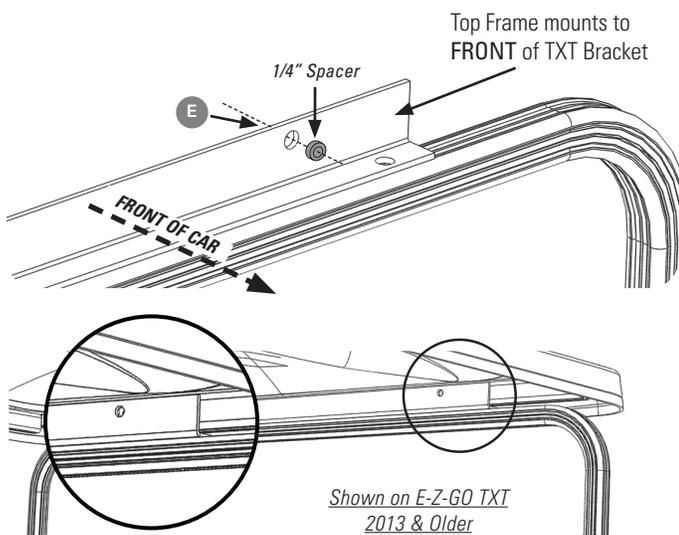

E-Z-GO / 2014 & NEWER / RXV


— Fully tighten Hardware.

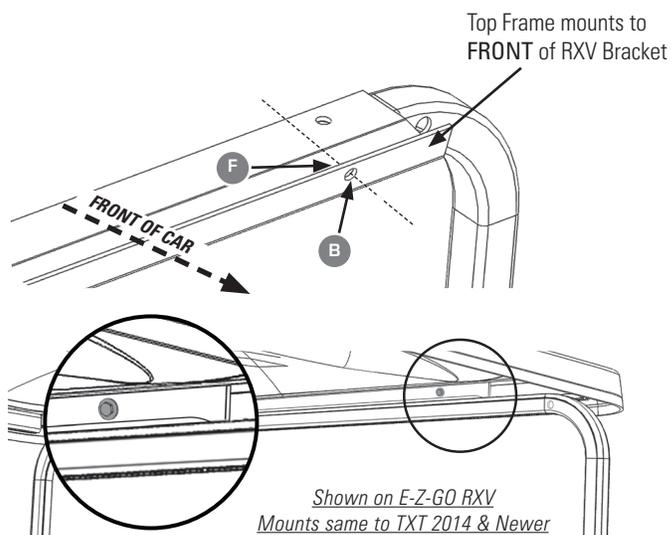

HARDWARE - SCALE 1:1


(Install Rubber Washers (B) between Brackets & Frames)

C x4

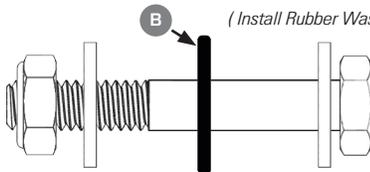


1/4" X 1-3/4" Hex Bolt - Rubber Washer - 1/4" Flat Washer (x2) - 1/4" Nyloc Jam Nut

E x2




1/4" X 1-1/2" Hex Bolt - 1/4" Flat Washer (x2) - 1/4" Spacer - 1/4" Nyloc Jam Nut

D x2

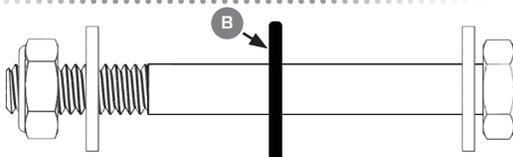

1/4" X 2-1/2" Hex Bolt - Rubber Washer - 1/4" Flat Washer (x2) - 1/4" Nyloc Jam Nut

F x2



1/4" X 1-1/2" Hex Bolt - Rubber Washer - 1/4" Flat Washer (x2) - 1/4" Nyloc Nut

STEP



4

SECURE TOP TO REAR FRAMES

Locate the correct Mounting Holes. Follow the Hole Diagram below for positioning Rear Frames to the Top Frame and mount with provided hardware.
**** Place Rubber Washers (B) between Brackets & Frames when installing ****

E-Z-GO TXT & RXV / YAMAHA G14-G22, DRIVE & DRIVE 2



— Fully tighten Hardware.

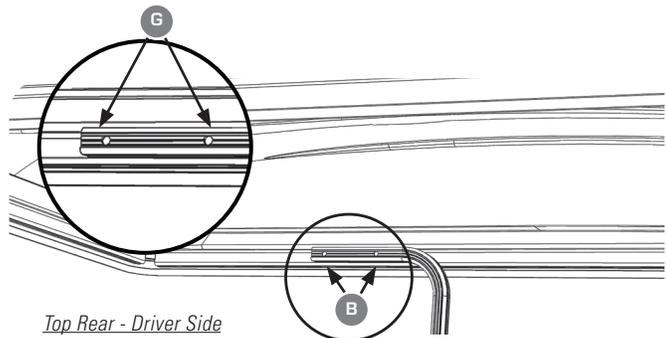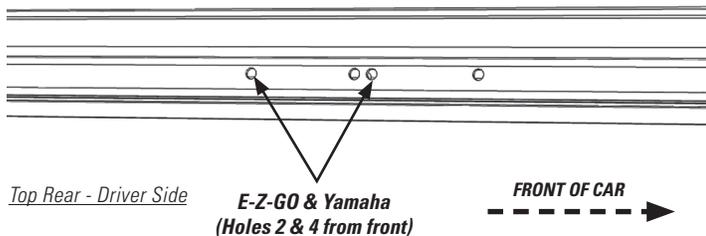

NOTE: Fully tighten Rear Frame hardware to Seat Back Supports.

CLUB CAR DS & PRECEDENT


— Fully tighten Hardware.

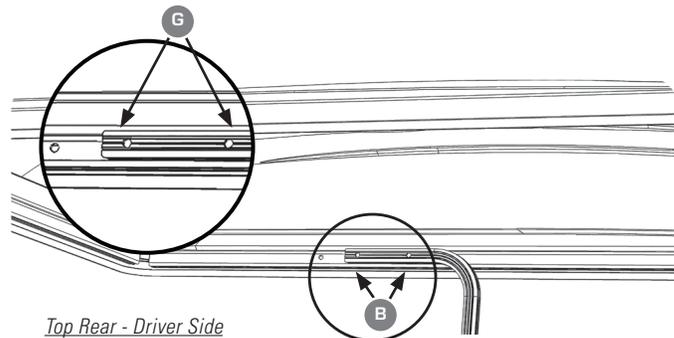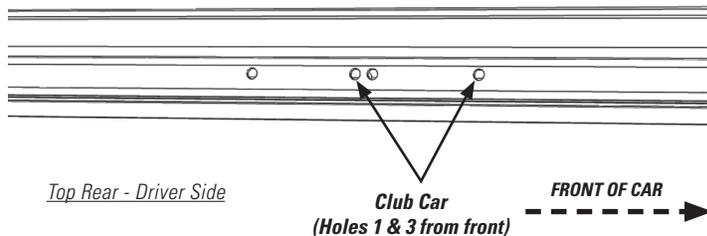

NOTE: Fully tighten Rear Frame hardware to Seat Back Supports.

HARDWARE - SCALE 1:1

(Install Rubber Washers (B) between Brackets & Frames)

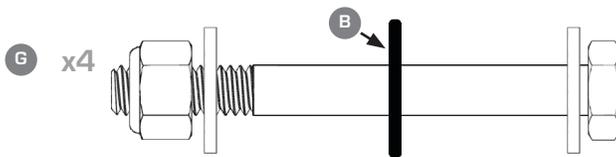

1/4" X 2-1/2" Hex Bolt - Rubber Washer - 1/4" Flat Washer (x2) - 1/4" Nylon Nut



(This page left blank intentionally)